


## 19.0 STANDARD DRAWINGS

### INDEX TO STANDARD DRAWINGS

600	Bicycle Standards	Drawing No.
	Bike Way-Finding Sign	600
	Bike Rack	601
	Typical No Parking Sign Configuration with Bike Lane	602
	Sign Post Installation and Foundation	603


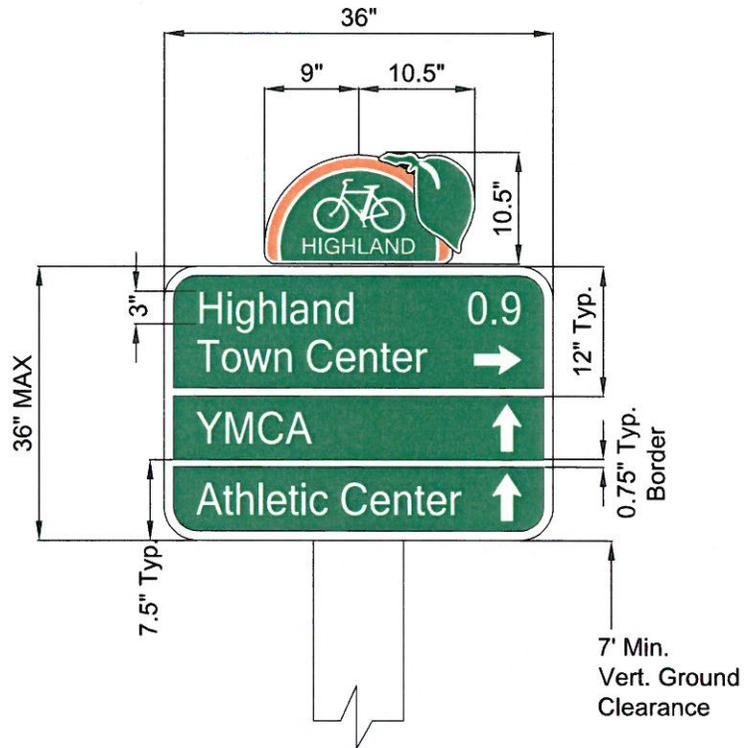


NOTES:

1. CAPITAL LETTERS TO BE 3" HIGH.
2. LOWER CASE LETTERS TO BE 2.25" HIGH.
3. LETTER & LEGEND COLOR TO BE WHITE.
4. BACKGROUND COLOR TO BE GREEN.
5. LOGO TRIM TO BE ORANGE.
6. SIGN TRIM TO BE WHITE.
7. LEAF COLOR TO BE GREEN.
8. SEE STD. DWG. 603 FOR FOUNDATION.
9. COLOR TONES TO BE APPROVED BY THE CITY.

N.T.S

CITY OF HIGHLAND			
△			
Mark	Revision	By	Date
Approved: <i>Ernest Wong</i> Date: <u>9-6-16</u> Ernest Wong, Public Works Director/City Engineer			Standard Drawing No. <b>600</b>
BIKE WAYFINDING SIGNS			

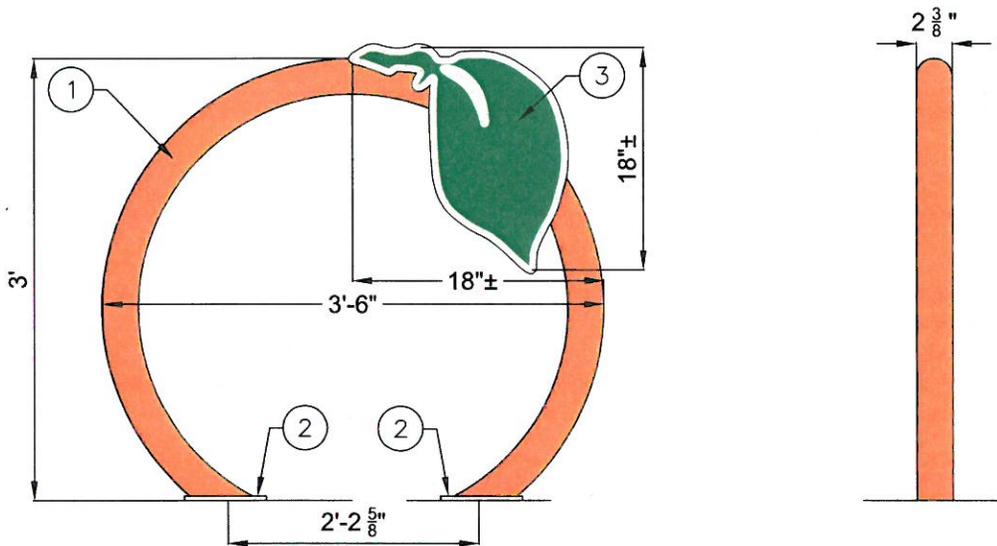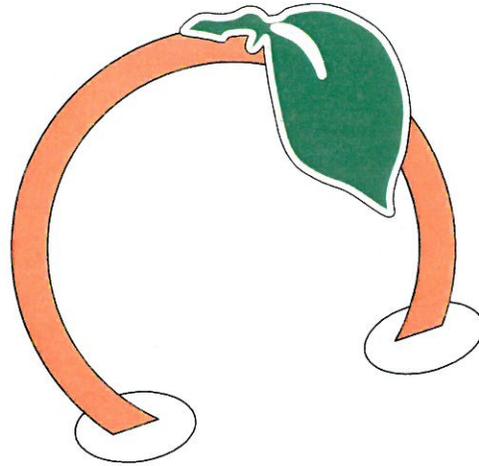

**NOTES:**

1.  $2\frac{3}{8}$ " Ø O.D. SCH. 40 STEEL PIPE BIKE STAND. POWDER COAT 'ORANGE' TO MATCH CITY LOGO.
2. 6" Ø,  $\frac{1}{4}$ " THICK SURFACE MOUNT FLANGE; MOUNT TO EXISTING CONCRETE SLAB W/ (4)  $\frac{3}{8}$ " x  $1\frac{1}{2}$ " CONCRETE EXPANSION ANCHORS PER FLANGE, EVENLY SPACED.
3.  $\frac{1}{4}$ " THICK PLATE STEEL METAL CITY LOGO. CONTACT CITY FOR LOGO ART AND COLORS. INSTALL BIKE RACK WITH LEAF FACING STREET.

N.T.S

△				<b>CITY OF HIGHLAND</b>	
	Mark	Revision	By	Date	<b>BIKE RACK</b>
Approved: <i>Ernest Wong</i> Date: <i>9-6-16</i> Ernest Wong, Public Works Director/City Engineer				Standard Drawing No. <b>601</b>	




NOTES:

1. USE 24" WIDE R81 (CA) BIKE LANE SIGNS. NO PARKING OR NO STOPPING ANY TIME SIGNS INSTALLED IN CONJUNCTION WITH BIKE LANE SIGNS SHALL BE 24" WIDE.
2. NO PARKING SIGNS SHALL BE R8-3A OR R26 (CA). NEW NO PARKING SIGNS SHALL BE THE SAME TYPE AS EXISTING NOR PARKING SIGNS WITHIN A ROADWAY SEGMENT UNLESS OTHERWISE DIRECTED BY CITY ENGINEER. USE R26 (CA) NO PARKING SIGNS WITHIN ROADWAY SEGMENTS WHERE NO PARKING SIGNS DO NOT EXIST.
3. NO STOPPING ANY TIME SIGNS SHALL BE R26(S) (CA).

N.T.S

△				<b>CITY OF HIGHLAND</b>	
Mark	Revision	By	Date	TYPICAL NO PARKING SIGN CONFIGURATION WITH BIKE LANE	
Approved: <u><i>Ernest Wong</i></u> Date: <u>9-6-16</u>					
Ernest Wong, Public Works Director/City Engineer					

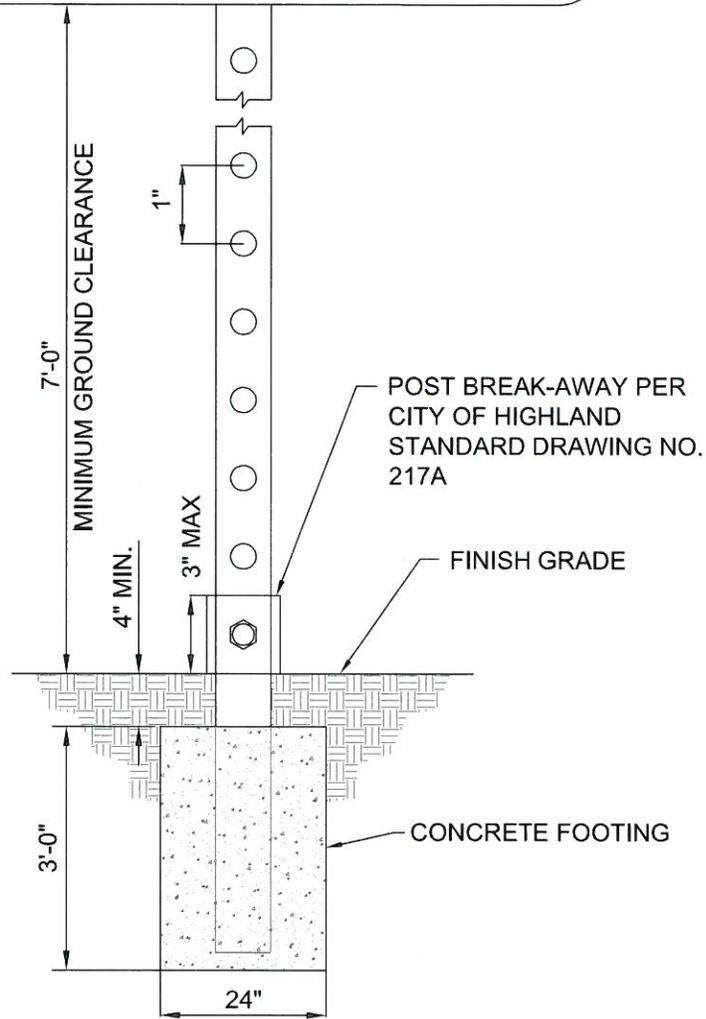

**NOTES:**

1. SIGN POSTS SHALL BE 2" X 2" GALVANIZED STEEL AND SHALL BE INSTALLED INTO GROUND WITH 2-1/4" X 2-1/4" X 30" ANCHOR, C.C.S.S. TYPE. ATTACH POST AND ANCHOR WITH TWO (2) DRIVE RIVETS.
2. THERE SHALL BE A CLEARANCE OF 7' BETWEEN FINISHED GRADE AND BOTTOM OF LOWER SIGN. ANCHOR SHALL EXTEND NO MORE THAN 3" ABOVE FINISHED GRADE.

N.T.S

<b>CITY OF HIGHLAND</b>			
△			
Mark	Revision	By	Date
Approved: <i>Ernest Wong</i> Date: <i>9-6-16</i> Ernest Wong, Public Works Director/City Engineer		<b>SIGN POST INSTALLATION AND FOUNDATION</b>	
			Standard Drawing No. <b>603</b>